

The Z130 Whirlpool Spa Specifications

The Z130 is a luxurious octagonal whirlpool spa which will seat up to seven people with room to spare. The Z130 features one high volume, fully adjustable jet and four high volume, directionally adjustable whirlpool jets strategically located about the spa. The Z130 also features an underwater light with interchangeable colored lenses.

For convenience, a clearly labeled control panel allows push-button control of the integrated heater, filter, whirlpool, light and air blower functions, as well as thermostatic control of water temperature from inside or outside the spa. The Silent Air Induction feature may be adjusted by means of control knobs located next to the control panel. A fully programmable schedule can be set for automatic control of temperature.

The Z130 features a patented front load skimmer/filter which makes up the 25 square foot filtration system. This system has been designed to allow easy access to the filter cartridge without the need to drain the spa or open the skirt door.

The spa shell, which is foam insulated to save energy costs, is tastefully surrounded by a handsome factory installed wooden skirt.



All necessary equipment of the Z130 is mounted within the perimeter of the shell, so the spa is easy to install. The spa requires a separate 230 VAC, 50 AMP, grounded GFCI (Ground Fault Circuit Interrupter) protected circuit. The spa is available in several lustrous acrylic colors with color-coordinated fittings.

Positioning Your Spa


You can locate the Z130 just about anywhere you wish—on a deck, patio, or even indoors. Just be sure to position it above ground in an area with good drainage, and on a level, continuous surface which can support the weight of the spa when filled with water and people. This weight is approximately 4194 pounds (94 pounds per square foot) including spa, water, and people. You must also provide access to the spa's equipment for service and general maintenance.

Options

- Insulating Cover

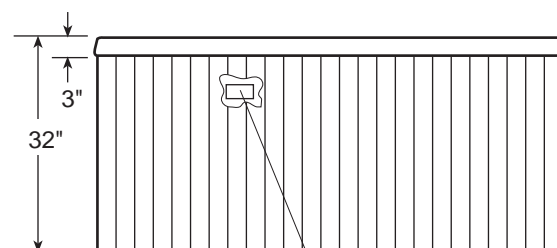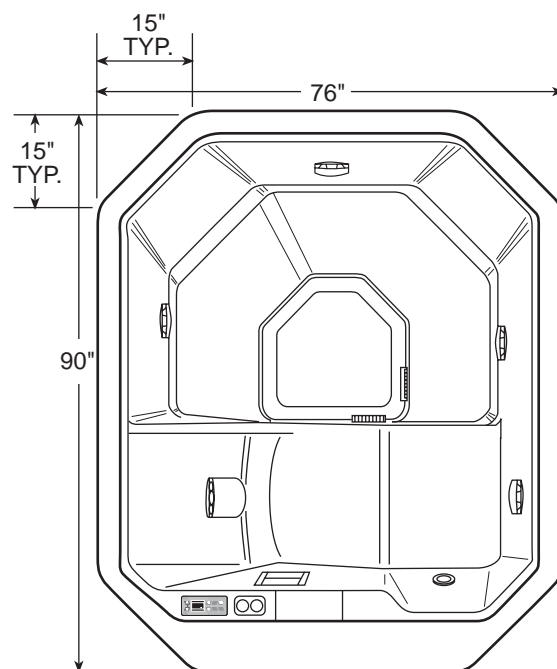

SERIAL NUMBER LOCATION

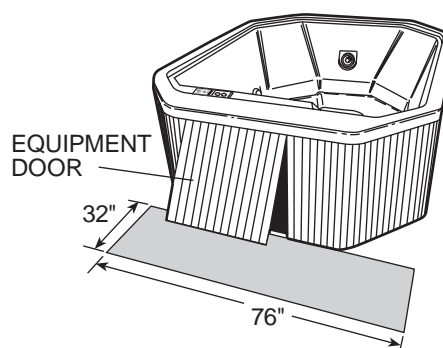

DIMENSIONS	WHIRLPOOL MOTOR/PUMP	FILTER MOTOR/PUMP	OPERATING GALLONAGE	ELECTRIC HEATER	PRODUCT WEIGHT	SHIPPING WEIGHT	ELECTRICAL REQUIREMENTS
90" (2286 mm) L 76" (1930 mm) W 32" (813 mm) H	1.0 HP 230 VAC 3450 RPM Single Phase 60 Hz	1.0 HP 230 VAC 3450 RPM Single Phase 60 Hz	325 U.S. gal (1230 liters)	5.5 kW	587 lb (267 kg)	911 lb (414 kg)	230 VAC 50 AMP 60 Hz GFCI Protected Separate Circuit

Product specifications are subject to change without notice.

